

## AFO-NT NET WEIGH BAG FILLING SCALE

### FEATURES

---

- Up to 14 bpm rate on Single Bucket
- Up to 22 bpm rate on Double Bucket
- Bulk / Dribble fill cycle
- V-Clamp provides positive bag holding during fill cycle
- Digital keypad interface
- Stainless steel construction available

### SUITABLE FOR A WIDE RANGE OF PRODUCTS INCLUDING

---

- Grain
- Seed
- Stockfeeds
- Granular free-flow products

The AFO-NT net weigh scale is designed for packaging free-flowing, granular products into open mouth bags. The net weigh bucket continuously refills with product and is discharged by the operator's signal.

The internal bulk and dribble flow gates are adjustable for use with a variety of products and the digital keypad provides easy set-up. Double bucket units provide a faster bagging rate and can be used for feeding automatic bagging systems.



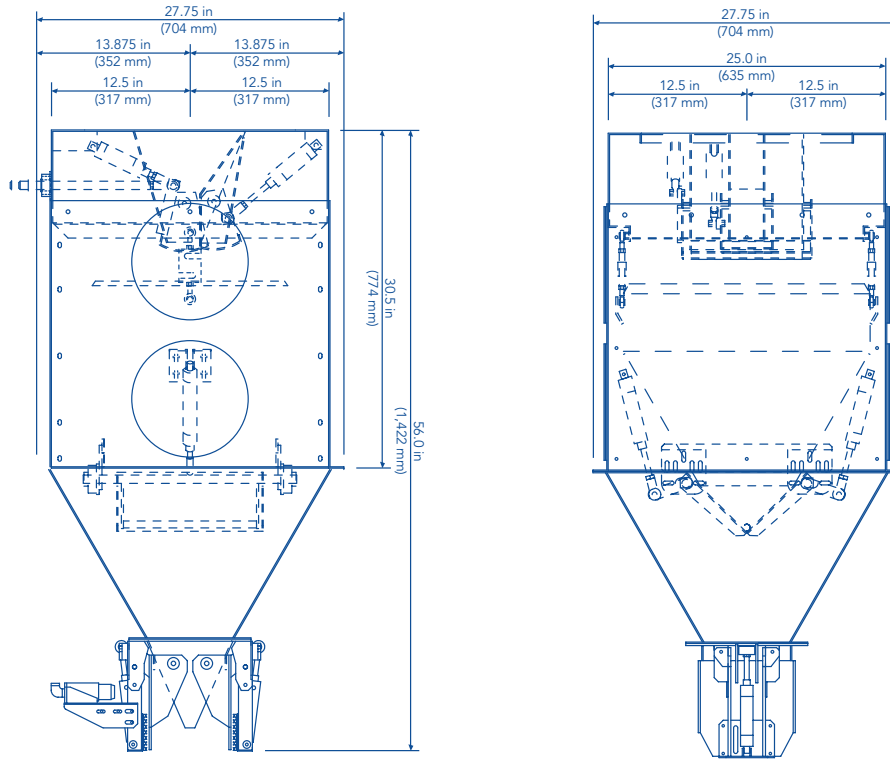


Diagram dimensions are for reference only\*

<b>Dimensions</b>	1422 h x 704 w x 704 d (simplex)
<b>Dimensions</b>	1676 h x 1339 w x 704 d (duplex)
<b>Speed</b>	Up to 14 bpm, 22 bpm duplex
<b>Accuracy</b>	+/- 9 gm
<b>Weight Range</b>	10 - 50 Kg
<b>Operating Temperature</b>	-10 deg c to + 40 deg c
<b>Scale</b>	Load cell with digital display
<b>Construction</b>	Carbon steel blasted & painted
<b>Electrical Requirements</b>	230 V, 1 Phase
<b>Air Requirements</b>	6 Bar Consumption 150 L/Min