

## AXIS

### SEMI-AUTOMATIC TURNTABLE STRETCH FILM PALLET WRAPPER

#### FEATURES

---

- User-friendly and innovative X5 control panel, useful for programming and monitoring all machine cycles, including modifying film pre-stretch and tension along with customising wrap programs.
- Remote Wi-Fi connection
- Film consumption meter
- 230V VAC 1 PH 50/60Hz
- 2.3 kW
- 5 -12 rpm rotation speed
- 1650mm diameter plate standard
- 2000kg weight capacity
- Synchronized stop
- Soft start & stop
- Load height detection
- Forkliftable

#### OPTIONS

---

##### AXIS 314

- 2 variable film pre-stretch motor options (150 to 400% pre-stretch)
- Capacity upgrade
- Size upgrade
- Cool store options
- Corrosive environment options
- Ramps for hand trucks

Introducing the new generation of turntable stretch wrapping machines that are redefining reliability and productivity standards in the industry. Italian engineering at its finest! It's an excellent choice for a wide range of medium to heavy industrial applications.

The Axis is designed with user-friendliness in mind, featuring a new multifunctional touchscreen and a turntable that stabilises light and irregular loads. With a film consumption meter, Wi-Fi access, and powered variable pre-stretch, logistics staff can maximise their pallet wrapping productivity.

Boost your film yield by up to 400%!



## OPTIONS

### AXIS AW 214

- Automatic film clamp, cut, weld for tidy film tail control with no manual intervention
- 2 variable film pre-stretch motor options (150 to 400% pre-stretch)
- Capacity upgrade
- Base plate size upgrade available to 1800mm diameter
- Size upgrade
- Cool store options
- Corrosive environment options
- Ramps for hand trucks

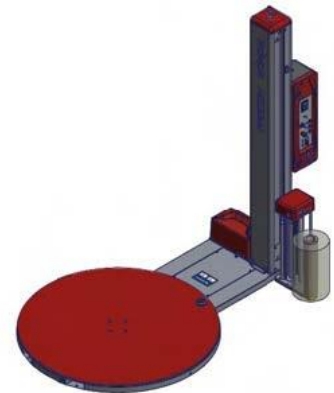
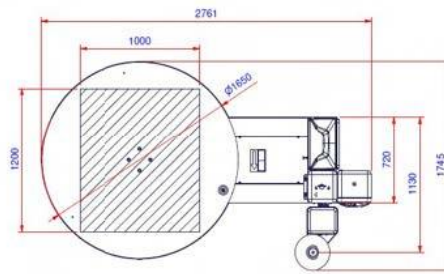
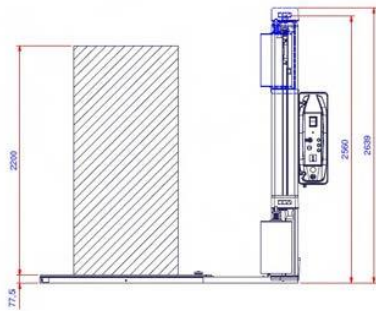


Diagram dimensions are for reference only\*

	AXIS X4 310	AXIS X4 312	AXIS X5 312	AXIS X5 314
<b>Carriage Type</b>	Electromagnetic power brake	Power pre-stretch motorized	Power pre-stretch motorized	2 variable pre-stretch motors
<b>Film Stretch</b>	Manual adjustment	Adjustable from panel	Adjustable from panel	Adjustable from panel
<b>Pre-Stretch</b>	NA	250%	250%	150÷400%
<b>Power Supply Voltage</b>	230V 1 PH (±10%) 50/60 Hz			
<b>Installed Power</b>	1.5 kW	1.9 kW	1.9 kW	2.3 kW
<b>Carriage Up-down Speed</b>	1.4÷4 m/min			
<b>Table Rotation Speed</b>	5÷12 rpm			
<b>Plate Diameter</b>	Ø 1650 mm STD - Ø 1800 mm Opt.			
<b>Plate Capacity</b>	2000kg			