

TORQUE

SEMI-AUTOMATIC ROTATING ARM PALLET WRAPPER FOR UNSTABLE OR HEAVY PRODUCTS

FEATURES

- Carriage with manual adjustable film tensioning.
- Control Panel – Control panel with prompts
- Arm rotation speed: 7 -11 rpm
- Max load height: 2000mm
- Max pallet dimensions: 1200 x 1200mm (other models available for larger pellets)
- Max load capacity: Unlimited
- Power: 230V 1 PH 50/60 Hz
- Progressive start/stop
- Auto load height sensing

OPTIONS

- Wall mount (no footprint for tight installs)
- Capacity upgrade
- Size upgrade
- Cool store options
- Corrosive environment options
- Auto film tensioner
- Film pre-stretch
- Top & bottom wrapping
- Customizable programs

The Torque is your multi-functional semi-automatic rotating arm pallet wrapper. Your pallet stays static on the ground while the arm rotates around it, securely wrapping it. This means your load doesn't shift during the wrapping cycle, allowing you to wrap at higher speeds. Since there's no turntable, there are no weight restrictions.

It features a film carriage with a mechanical brake and manually adjustable film tension. The control panel lets you adjust a range of settings, from arm rotation speed and carriage movement to high and low speed settings, as well as end-of-cycle carriage adjustment.

A great way to save floor space and make your pallet wrapping process hassle-free!



LAYOUT BOOM S 210 [mm]

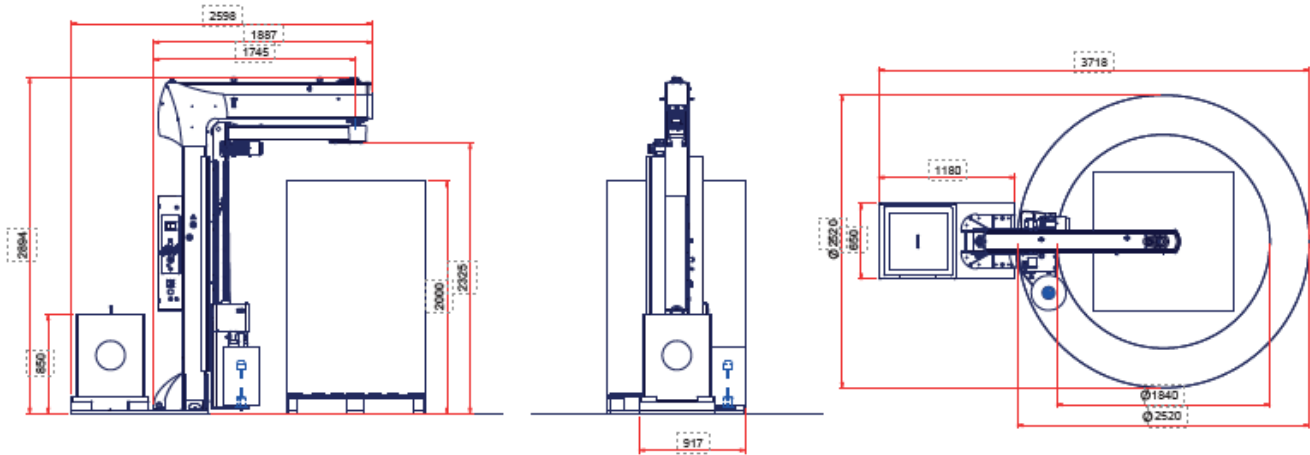


Diagram dimensions are for reference only*

Features

BOOM S

202 | 210 | 212

Maximum product height (mm)	2000 std. 2400 opt.
Maximum pallet dimensions (LxW)	1200x1200mm
Arm rotation speed (rpm)	7÷11
Carriage up-down speed (m/min)	2.6÷6
Film carriage type	Mechanical Brake Electromagnetic Power Brake Power Pre-Stretch Motorized
Film tensioning	Manual adjustment Adjustable from panel Adjustable from panel
Film pre-stretch	N/A
Power supply voltage (V)	230 V ±10% 1Ph 50/60Hz
Maximum reel dimensions (HxØ)	500x300mm
Max reel weight (kg)	20
Film thickness (µm)	7÷35