

## ECO

Simple and reliable. This semi-automatic turntable is perfect for straightforward low-to-medium duty pallet wrapping.

### FEATURES

---

- Plate Diameter: 1650mm
- Plate Rotation: 5 -12 rpm
- Power: 230V 1PH 50/60Hz
- Soft/progressive Start & Stop
- Plate Capacity: 2000kg
- Height detection photocell
- Front and rear forklift capability

### OPTIONS

---

#### Eco 302

Carriage type: Mechanical brake

Film stretch: Manual adjustment

#### Eco 310

Carriage type: Electromagnetic brake

Film stretch: Adjustable from panel

#### Eco 312

Carriage type: Power pre-stretch motorized

Film stretch: Potentiometer

The Eco has been designed by combining the best packaging technologies with innovative Italian engineering.

It's ideal for most low-duty pallet wrapping applications. The adjustable acceleration and deceleration phases of the turntable ensure maximum safety when handling unstable loads. These features, along with the new carriage line and the "X3" control panel, make Eco simple, sturdy and reliable.



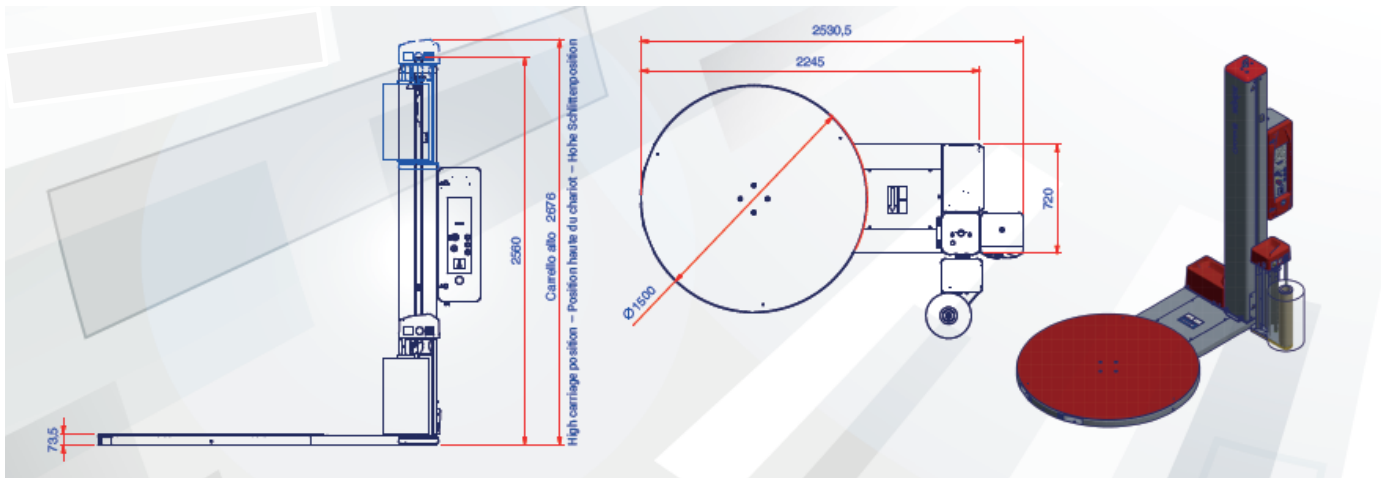


Diagram dimensions are for reference only\*

	ECO 302	ECO 310	ECO 312
<b>Carriage Type</b>	<i>Mechanical brake</i>	<i>Electromagnetic power brake</i>	<i>Power pre-stretch motorized</i>
<b>Film Stretch</b>	Manual adjustment	Adjustable from panel	Potentiometer
<b>Pre-Stretch</b>	NA	NA	250%
<b>Power Supply Voltage</b>	(VAC) 230V 1 PH(±10%) 50/60 Hz		
<b>Installed Power</b>	1.2Kw	1.5Kw	1.9Kw
<b>Carriage Up-down Speed</b>	1.4÷4 m/min		
<b>Table Rotation Speed</b>	5÷12 rpm	5÷12 rpm	5÷12 rpm
<b>Plate Diameter</b>	Ø 1500 STD (59") - Ø 1650 OPT (65")		
<b>Plate capacity</b>	2000kg/ 4409lb STD		
<b>Minimum Product Dimensions</b>	LxWxH 500 x 500 x 500 (mm) / 20 x 20 x 20 (")		
<b>Max Product Dimensions</b>	LxWxH 800x1200x2200 (mm) STD / 31 x 47 x 87 (") LxWxH 1000x1200x2400 (mm) OPT 39 x 47 x 94 (")		