

Ilterpal L Layer Pressing Palletizer


Automatic Hybrid Palletizer

BENEFITS

- Open-mouth bag overlapping
- Optimal pallet finishes
- Energy savings
- Component savings
- Gentle, quiet, precise palletising
- Flexible, quick format changes
- Optimised plant space
- Versatility for handling a wide range of formats
- Easy maintenance as all moving parts is at ground level

5-sided layer pressing done properly! The Ilterpal L palletizer is the industry's new leading solution for perfect pallet stacks. This highly versatile system has applications across a wide range of industries including seed, grain, stockfeed, fertilizer, ingredients and more. '

New design solves lifting mechanism issues experienced with other brands. It is fully supported across Australian and New Zealand by trained technicians. The ILERPAL L offers a flexible design that pick off pallet conveyors or off stationary platform.

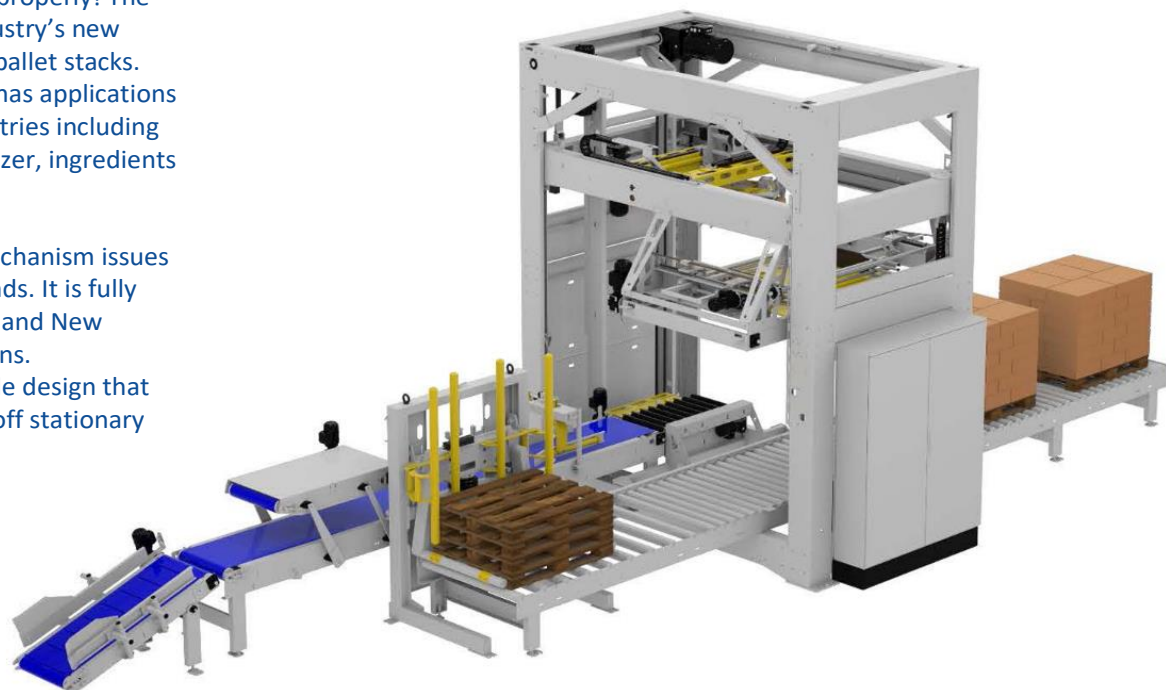

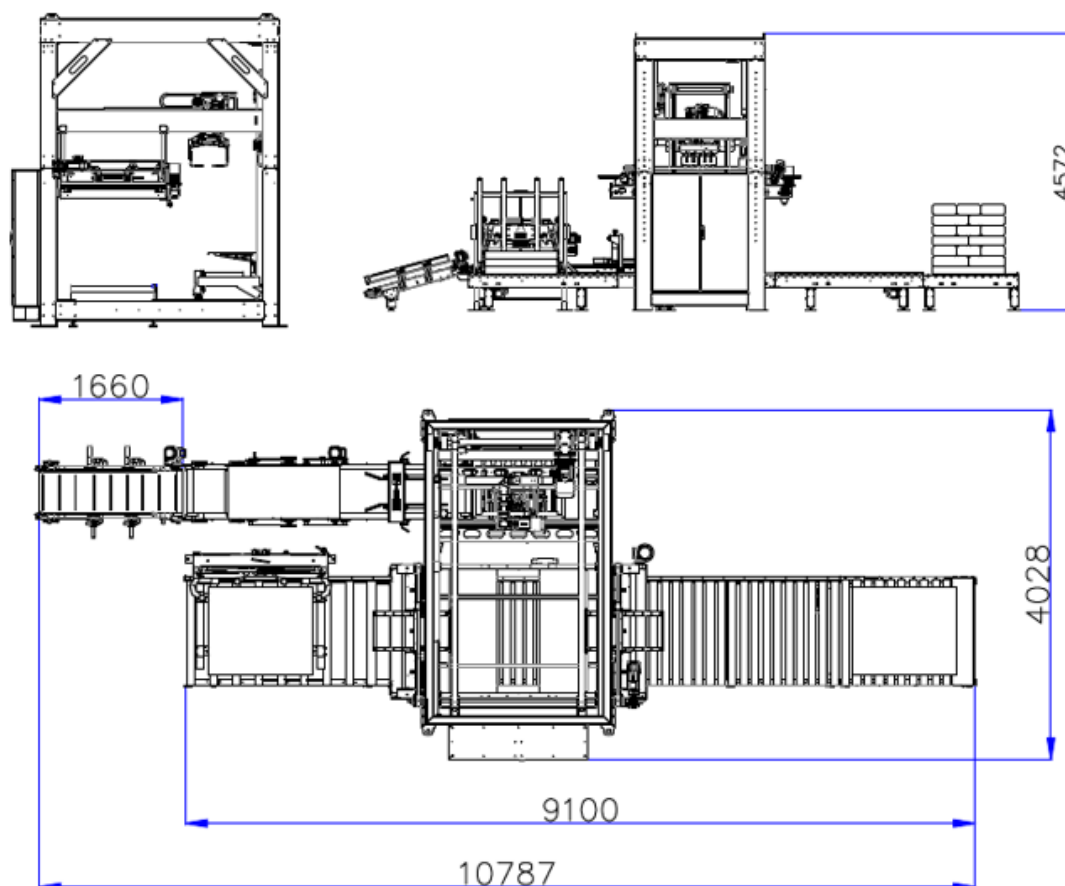


Diagram dimensions are for reference only*

Specifications

Voltage	380 III N+T 50 Hz
Control voltage	24 V
Power	28 Kw
Pressure	6 bar
Consumption	400 NL/min

Type	Item	Ud.	Value
Bags	Full bag width (min - max)	[mm]	240 - 460
	Full bag length (min - max)	[mm]	330 - 950
	Full bag height (min - max)	[mm]	60 - 230
	Bag weight (min - max)	[kg]	5 - 50
	Bag entrance height	[mm]	800
	Maximum layer weight	[kg]	250
Pallets	Bag conveying height	[mm]	600
	Pallet length (min – max)	[mm]	800 - 1350
	Pallet width (min - max)	[mm]	800 – 1200 (900 – 1300)
	Full pallet height (max)	[mm]	1800 / 2200 / 2700
	Full pallet weight (max)	[kg]	2200